NEXT ASSEMBLY	ISSUE	REVISION RECORD	DATE	APPD.

35MTC/1601
TIEDOWN ASSEMBLY
(VEHICLE)

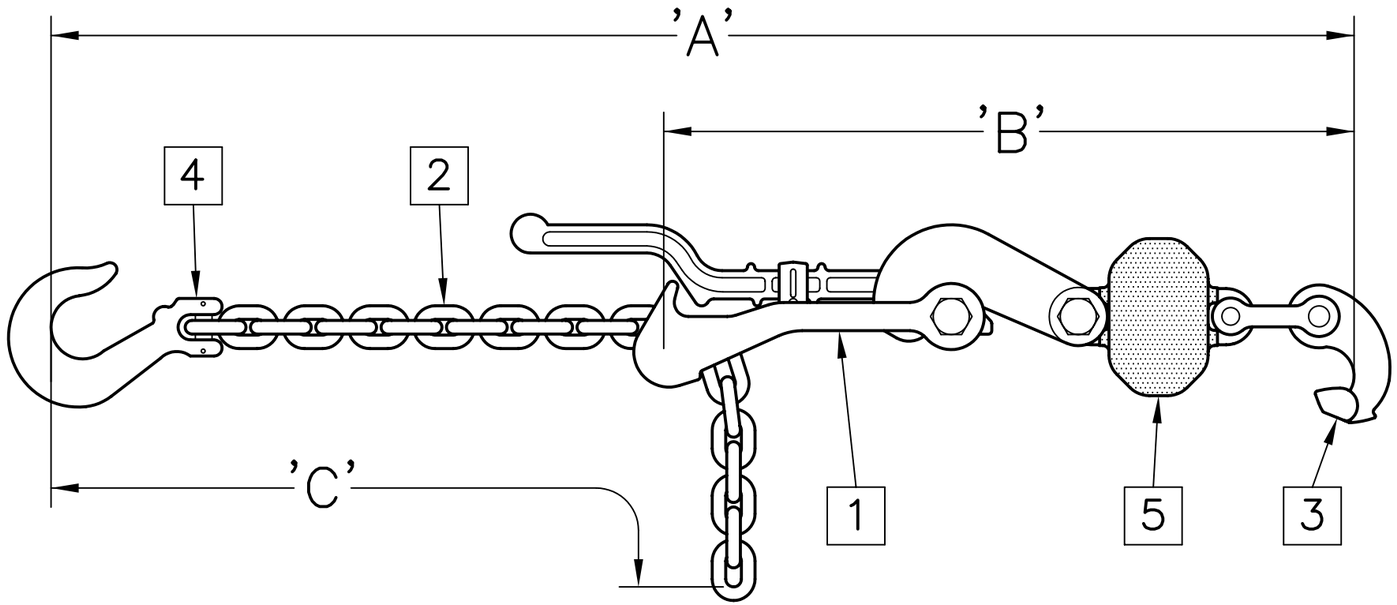

SPECIFICATIONS

MATERIAL:
ALL CONSTRUCTION IS PER BEST COMMERCIAL QUALITY. SEE CHART FOR SPECIFIC MATERIAL.

STRENGTH:
SAFE WORKING–17,500 LBS.
PROOF–19,250 LBS.
MINIMUM BREAK–35,000 LBS.

FINISH:
ALL SURFACE FINISHES PROVIDE GOOD CORROSION PROTECTION. SEE CHART FOR SPECIFIC FINISH.

WEIGHT:
19.8 KGS. [43.6 LBS.]

COMPLETE ASSEMBLY	
MODEL NO.	USEABLE LENGTH 'A'
35MTC/1601	35.0" TO 108.0"

TENSIONER ASSEMBLY	
MODEL NO.	DIM. 'B'
35MTC–1/1601	26.0"

CHAIN ASSEMBLY	
MODEL NO.	DIM. 'C'
35MTC–2/1601	84.5"

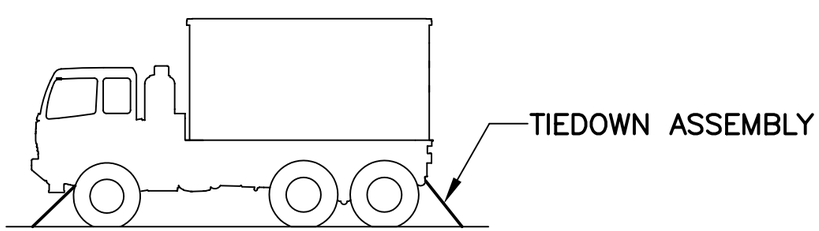

APPLICATION

ITEM NO.	PART NAME	PART DESCRIPTION
5	SHOCK MITIGATOR	CHAIN/ELASTOMER COMPOUND
4	HOOK	STEEL, ZINC PAINTED, BLUE
3	HOOK	STEEL, GALVANIZED, BLUE
2	CHAIN	STEEL, ZINC PLATED
1	TENSIONER	STEEL, GALVANIZED

LIST OF COMPONENTS

35MTC/1601
TIEDOWN ASSEMBLY
(VEHICLE)

Peck & Hale
PECK & HALE
180 DIVISION AVENUE
W. SAYVILLE, N.Y. 11796 U.S.A.

THIS DRAWING AND ANY PRINT MADE THEREFROM IS THE EXCLUSIVE PROPERTY OF PECK & HALE, IT MUST NOT BE TRACED NOR REPRODUCED IN ANY MANNER NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR WRITTEN CONSENT. IT SHALL BE USED ONLY AS MEANS OF REFERENCE TO WORK DESIGNED OR FURNISHED BY US.

FSCM No: 94658	DRN: S. JEFFREY	SHEET OF	
DATE: 11/19/12	CHK:	4214 DWG. NO.	REV.
SCALE: NONE	APPD:		